

## Modular Cooking Range Line EVO900 4-Hot Plates Electric Boiling Top

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**392040 (Z9ECEH4Q00)** 4-hot square plates (4 kW each) electric boiling top - 400V

**392166 (Z9ECEH4Q0N)** 4-hot square plates (4 kW each) electric boiling top - 230V

### Short Form Specification

Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Four 4 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 4kW cast-iron plates are hermetically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- Suitable for countertop installation.


### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: \_\_\_\_\_

**Optional Accessories**

- 2 cast iron plate bars for electric cooking top PNC 206056
- Junction sealing kit PNC 206086
- 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels. PNC 206135
- Support for bridge type installation, 800 mm PNC 206137
- Support for bridge type installation, 1000 mm PNC 206138
- Support for bridge type installation, 1200 mm PNC 206139
- Support for bridge type installation, 1400 mm PNC 206140
- Support for bridge type installation, 1600 mm PNC 206141
- Side handrail for right/left hand PNC 206165
- Frontal handrail 800 mm PNC 206167
- Large handrail (portioning shelf) 800 mm PNC 206186
- Frontal handrail 1200 mm PNC 206191
- Frontal handrail 1600 mm PNC 206192
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension PNC 206290
- Chimney upstand, 800 mm PNC 206304
- 2 side covering panels, height 250 mm, depth 900 mm PNC 206321
- Chimney grid net, 400mm PNC 206400

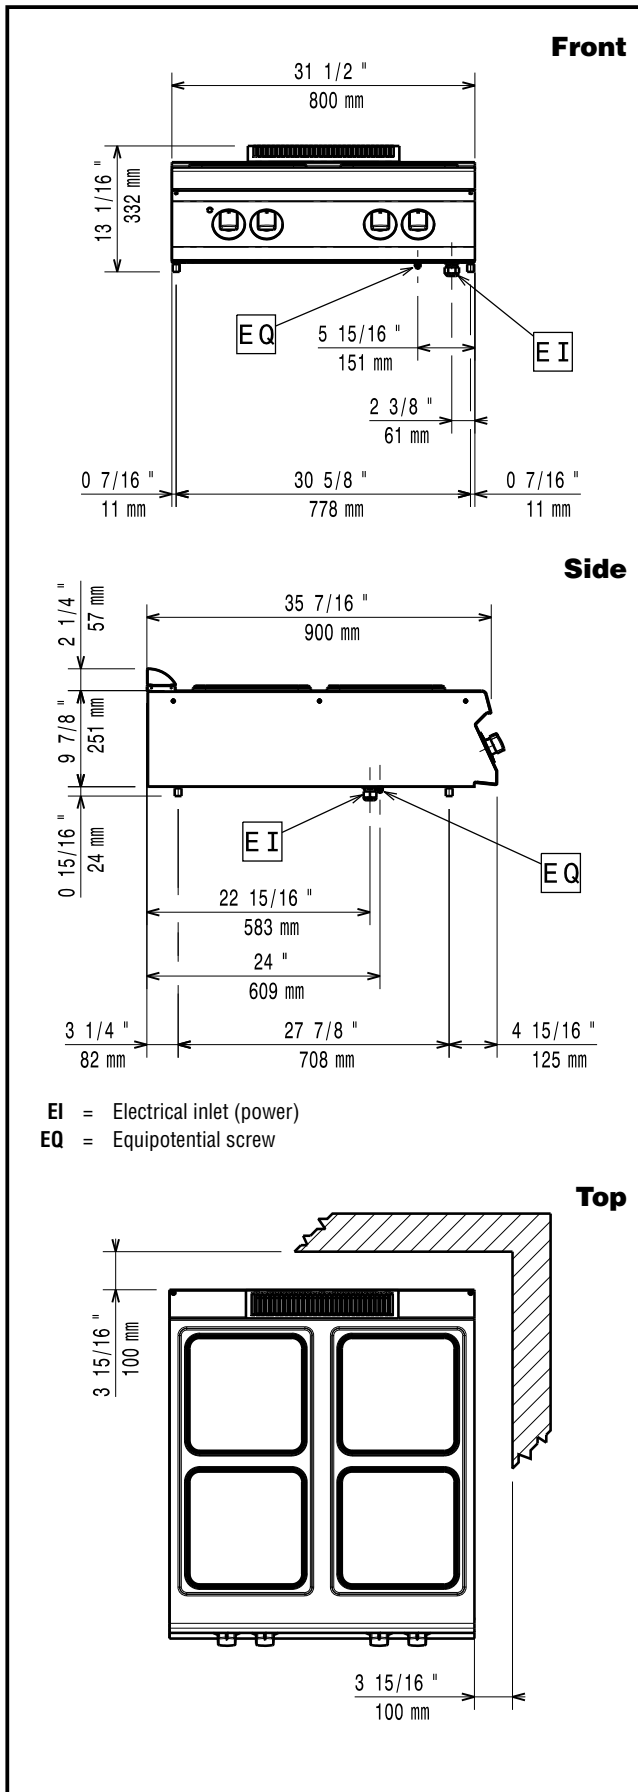

**Electric**

**Supply voltage:**

392040 (Z9ECEH4Q00) 380-400 V/3N ph/50/60 Hz  
392166 (Z9ECEH4Q0N) 230 V/3 ph/50/60 Hz

**Total Watts:**

16 kW

**Predisposed for:**

392040 (Z9ECEH4Q00) 380-400V 3N~ 50/60Hz 15-16kW

**Gas**

**Natural gas - Pressure:**

7" w.c. (17.4 mbar)

**LPG Gas Pressure:**

11" w.c. (27.7 mbar)

**Key Information:**

**Front Plates Power:**

4 - 4 kW

**Back Plates Power:**

4 - 4 kW

**Front Plates dimensions:**

300x300 300x300

**Back Plates dimensions:**

300x300 300x300

**Net weight:**

392040 (Z9ECEH4Q00) 60 kg  
392166 (Z9ECEH4Q0N) 69 kg

**Shipping weight:**

392040 (Z9ECEH4Q00) 70 kg  
392166 (Z9ECEH4Q0N) 74 kg

**Shipping height:**

392040 (Z9ECEH4Q00) 530 mm  
392166 (Z9ECEH4Q0N) 540 mm

**Shipping width:**

392040 (Z9ECEH4Q00) 1010 mm  
392166 (Z9ECEH4Q0N) 1020 mm

**Shipping depth:**

392040 (Z9ECEH4Q00) 860 mm  
392166 (Z9ECEH4Q0N) 900 mm

**Shipping volume:**

392040 (Z9ECEH4Q00) 0.46 m<sup>3</sup>  
392166 (Z9ECEH4Q0N) 0.5 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Certification group:**

392040 (Z9ECEH4Q00) EH94T  
392166 (Z9ECEH4Q0N) N9CE1